

Vibratory Finishing Bowl type machine

Type: EVP-A



**Machine with integrated
separation device**

TRUMLINGSAKTIEBOLAGET



EVP-A

Circular vibratory tumbling machine with flat bottom and integrated separation device.




The EVP-A series is characterized by high stock removal, quality, and long lifespan. Noise proofing lid is standard.

Discharge is facilitated through a floating flap and reverse vibration. The machine features easily interchangeable separation grids with a patented attachment mechanism.

Constructed with a sturdy steel frame, the container is welded and stress-relieved to ensure maximum lifespan.

The workbowl is lined with durable hot cured polyurethane lining. Superior power is guaranteed by a specially designed, extra powerful, fully enclosed vibratory motor with easily adjustable weights.

The control panel includes an electronic timer for process control and the machine can also be equipped with speed control and bottom unloading as options

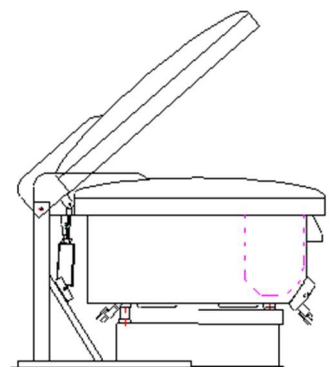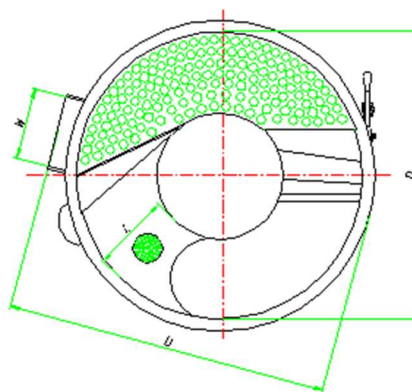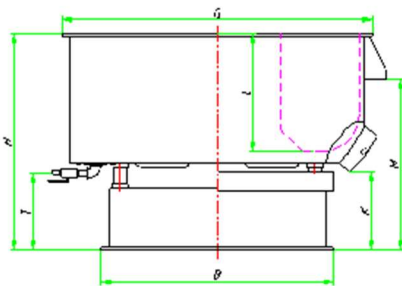

TYP	G mm	D mm	U mm	C mm	L mm	H mm	K mm	M mm	T mm	B mm	W mm	MOTOR VARVTAL (rpm)	MOTOR EFFEKT kW	DRIV-SPÄNNING V / Hz	MATERIAL DIMENSION mm	INFÖRDRING TJOCKLEK mm	MEDIA kg	MAX. ARBETS MÄNGD kg	VOLYM l	VIKT kg
EVP-A 220	1128	1000	1180	275	450	990	420	800	450	885	250	1450	1,5	400 / 50 (*)	5	20	120	200	270	460
EVP-A 350	1300	1200	1420	340	520	1115	400	920	470	1070	300	1450	2,2	400 / 50 (*)	5	20	180	300	450	655
EVP-A 550	1546	1400	1600	390	610	1215	400	990	450	1230	350	1450	4,0	400 / 50 (*)	6	25	350	400	735	1350
EVP-A 800	1740	1600	1830	445	620	1215	400	985	450	1370	400	1450	5,5	400 / 50 (*)	8	30	500	600	950	1430

TRUMLINGSAKTIEBOLAGET